


GC Capillary Column Applications: Petrochemical



Reference Gas Oil - ASTM 2887

Column	007-1, Dimethylpolysiloxane 10M. x 0.53mm I.D. X 1.0 µm film
Part No.	CH-100018
Temperature	35° (25°/min.) - 320 °C

Injector	300 °C
Detector	350 °C, FID
Carrier Gas	20 ml/min., Helium

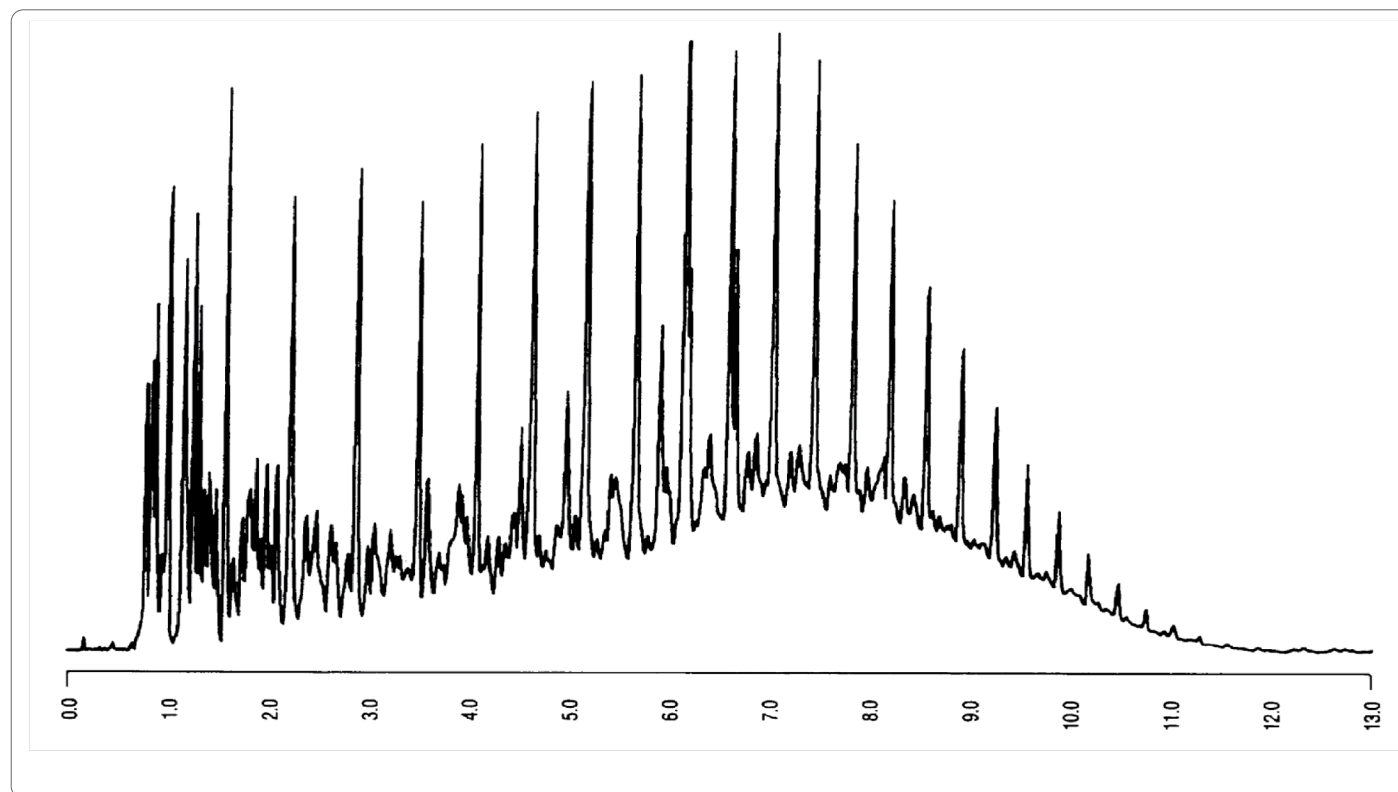

SHOP NOW

Visit our website at
[afplifesciences.com](https://www.afplifesciences.com)