


GC Capillary Column Applications: Petrochemical



Determination of Diesel Range Organics (DRO)

Column	007-1, Dimethylpolysiloxane 10M. x 0.53mm I.D. X 1.0 µm film
Part No.	CH-100018
Temperature	35° (15°/min.) - 320°C

Injector	250°C
Detector	320°C, FID
Carrier Gas	10 ml/min., Helium

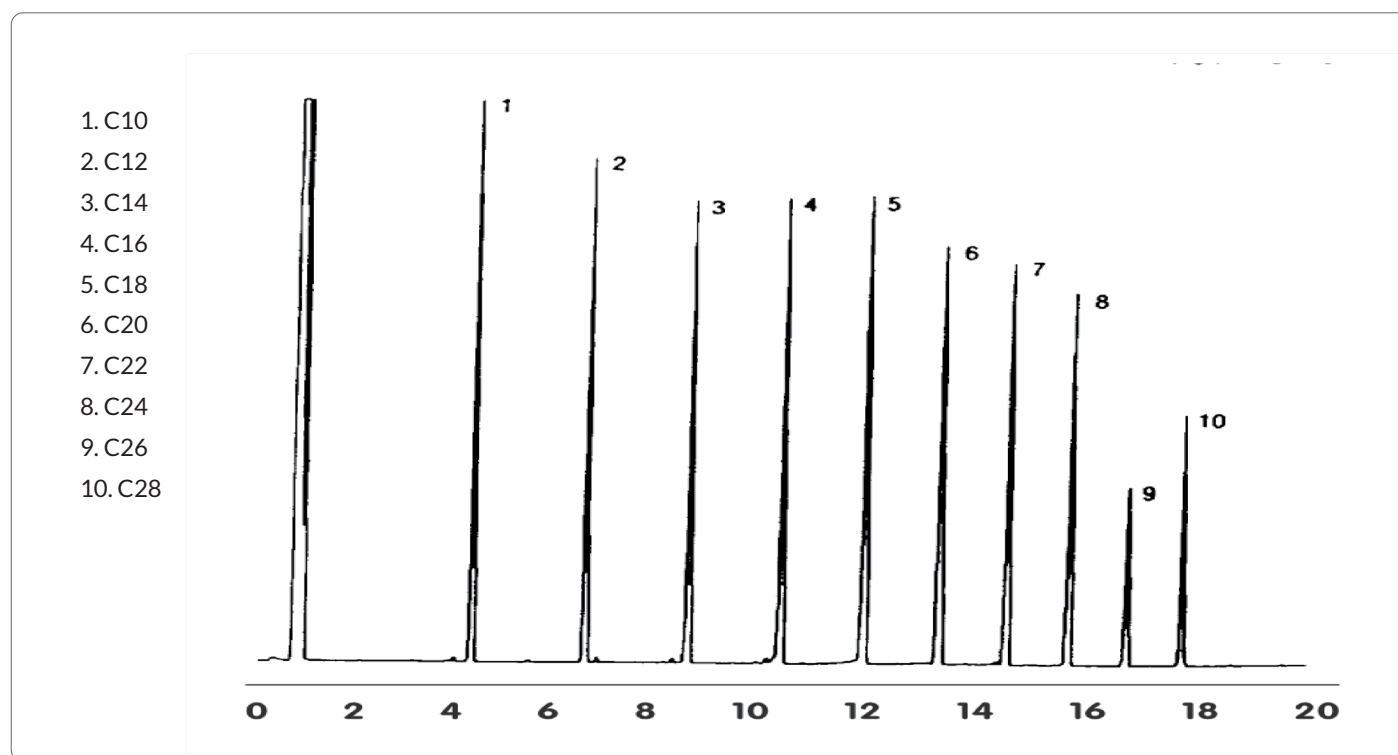

SHOP NOW

Visit our website at
[afplifesciences.com](https://www.afplifesciences.com)